Diagram

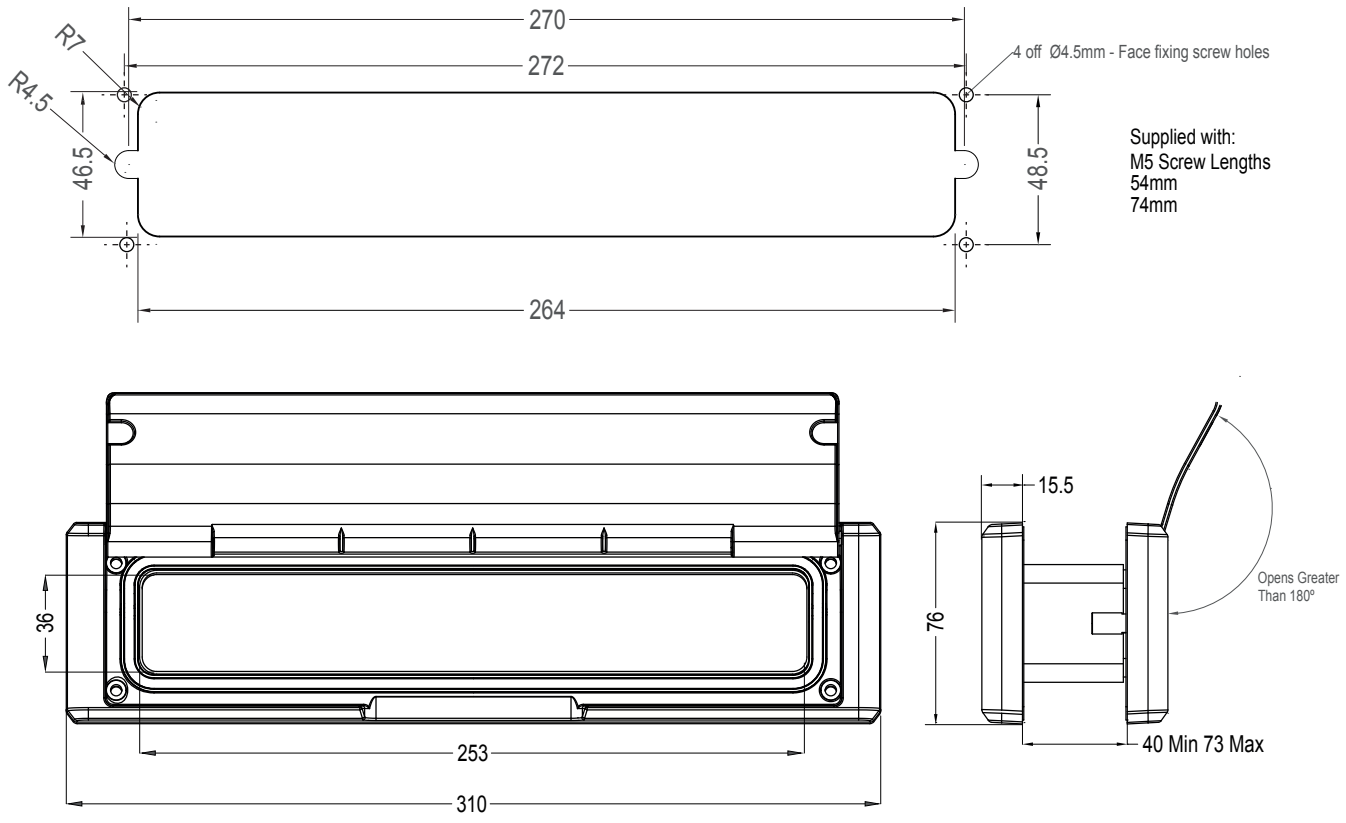

Fixing Instructions

Internal brush seal and external flap with integral weather proofing gasket.
The letter plate can be bolt through or face fixed.
Complies to PAS 24 letter plate opening size max 260mm * 40mm

1. Rout aperture in the door.
2. Apply self adhesive gasket to both internal and external part.
3. Offer up Internal part (with brush seal) into the door.
4. Offer up external part into the door.
5. Fit M5 machine screws from the inside for bolt through fixing or fixing screws internally and externally for face fixing.

Cleaning

Letter Plate should only be cleaned using warm soapy water and a soft cloth.
Do not clean any part with solvents or abrasive substances.

Failure to adhere to these instructions invalidates your Titon Product Guarantee.
Paint or corrosion not covered by Guarantee.